
DF-LED7771

POST TOP FIXTURE



Slipfitter Included




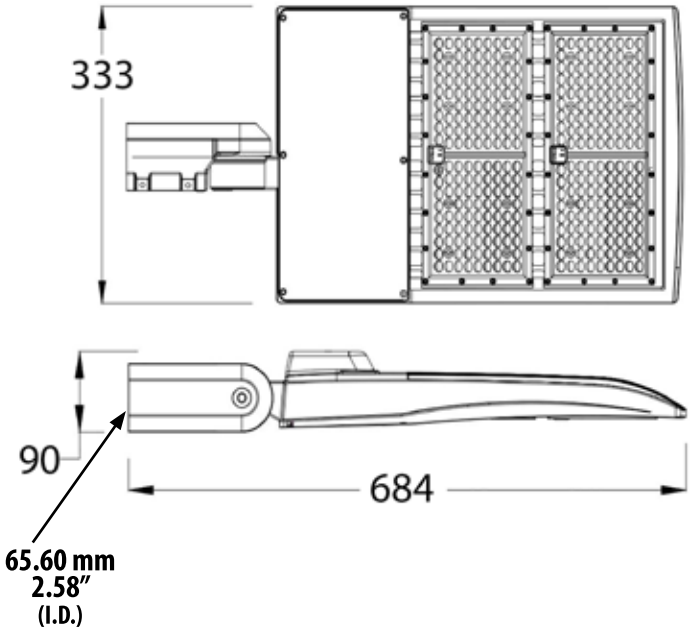

- **Material:** Powder Coated Cast Aluminum
- **Lens:** Clear, Polycarbonate Lens
- **Available Finish:** Black, Verde Green
- **Color Temperature:** 4000K
- **Lumens:** 37,500 Lm
- **0 - 10V Dimming Standard**
- **UL Listed**


MODEL NUMBER	LENS TYPE	LAMP TYPE	ILLUMINANT TYPE	WATTS (W)	VOLTS (V)	LAMP(S) INCLUDED?
DF-LED7771-T3	TYPE 3	SMD LED	LED	300	100-277	YES
DF-LED7771-T4	TYPE 4	SMD LED	LED	300	100-277	YES
DF-LED7771-T5	TYPE 5	SMD LED	LED	300	100-277	YES

TYPE III

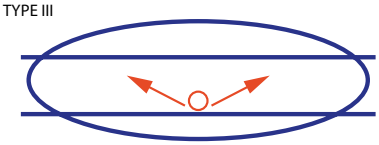


TYPE 3 Light Distribution

TYPE IV

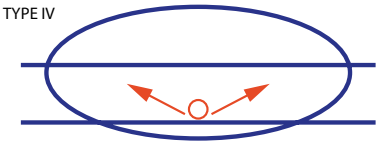

TYPE 4 Light Distribution

TYPE V

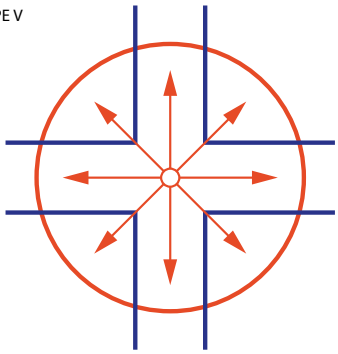

TYPE 5 Light Distribution

Overall Dimensions:
26.92"H x 13.11"W x 3.54"D

Weight: 18 lbs
Approximate Wire Length: N/A
Box Dimensions:

DF-LED7771




Photometric Results


IES Classification: Type V
Total Rated Lamp Lumens: 38518.28 lm
Efficiency: 100%
Upward Ratio: 0%
Central Intensity: 4305.37 cd
Pos of Max. Intensity: H225 V77

Longitudinal Classification: Medium
Measurement Flux: 38518.28 lm
Downward Ratio: 100%
Luminaire Efficacy Rating (LER): 127.35
Max. Intensity: 11104.35 cd

Luminous Intensity Distribution Curve

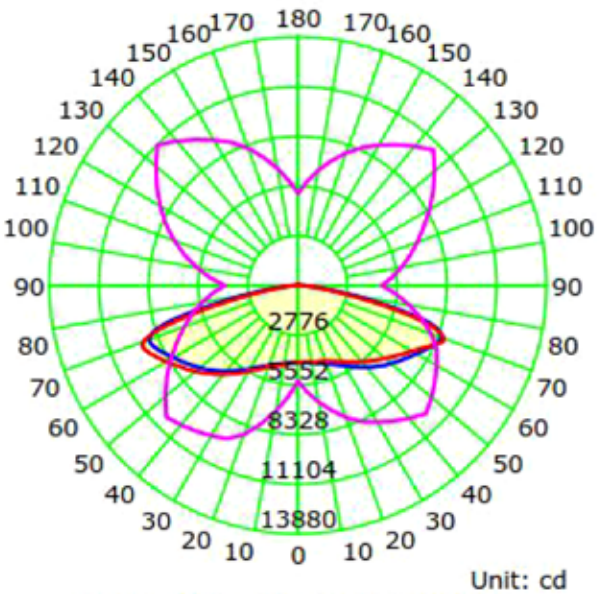

The Average Illuminance Effective Figure

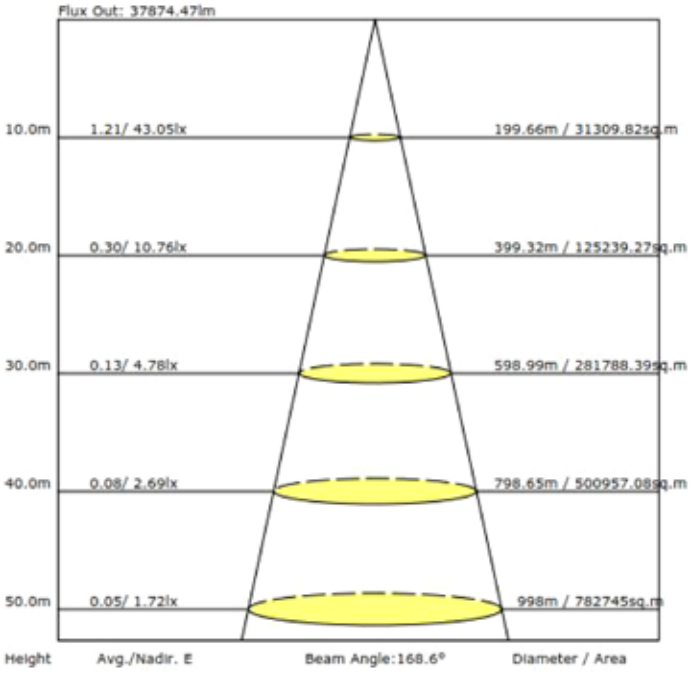

DABMAR LIGHTING

DABMAR LIGHTING INCORPORATED

320 Graves Ave . Oxnard, CA 93030 . 805.604.9090 . f: 805.604.9050 . www.dabmar.com