

ELEGANT
FURNITURE & LIGHTING™

Installation manual for

2500D44BK

Dimensions : L44″W44″L32
Collection : Vera Hanging
Bulb Type : E12 bulb, not include bulbs
Lamp Frame Weight: 83.7 LBS
Total Weight : 99 LBS



Thank you for choosing our product(s).
Our Company is actively involved in every step of the production.
Our product(s) are designed to be utilized for every application that graces your home or business.
We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.
Please find the enclosed detailed instruction and read carefully for proper installation.
If you have any questions, please contact the retailer Where the purchased was made.

SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF.BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

CAUTION


- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are “L” for live wire, “N” for neutral wire, “E” for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions.
where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

2500D44BK L44"W44"L32






Frame Assembly Diagram

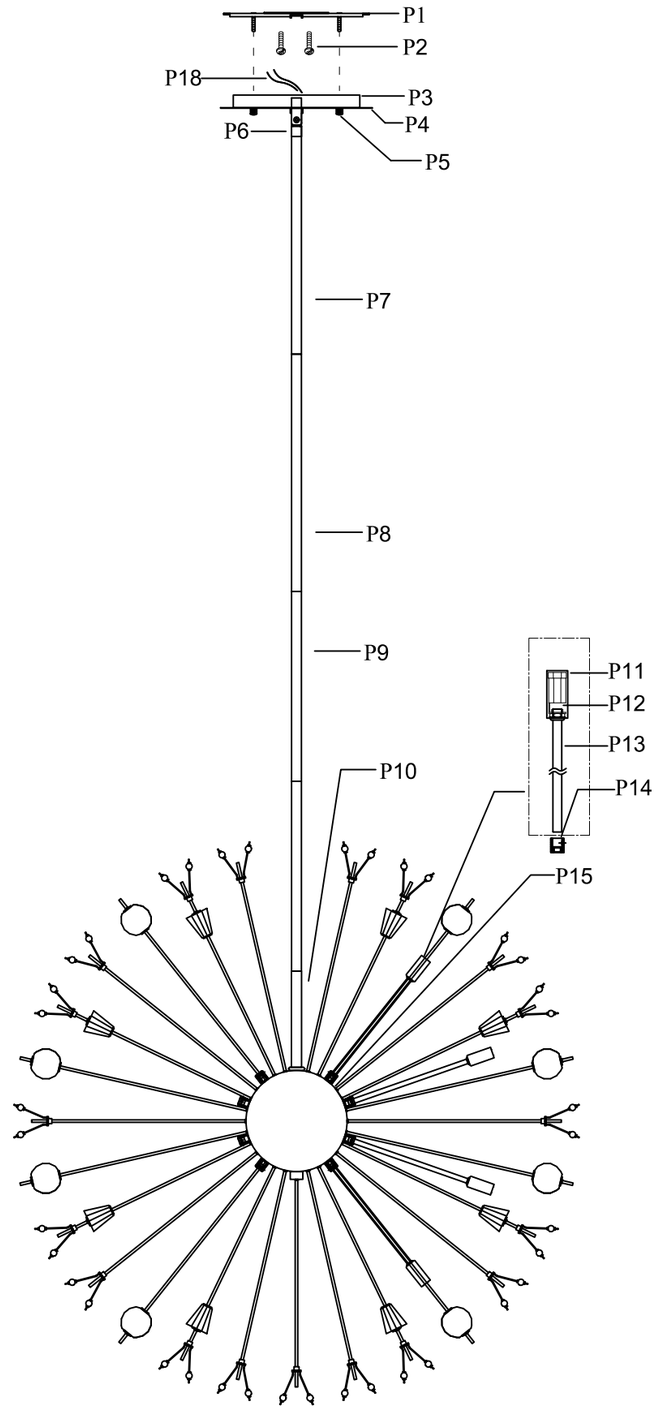


Step 1

Please use the parts list to ensure you are not missing any parts.

2500D44BK PARTS LIST

Parts Number	Part	Picture	Description	Qty
CP7R52BK	P1		Mounting bracket (L9"*W9")	1
	P2		Mounting bracket screw	2
	P3		Canopy (ϕ9.8"H1")	1
	P4		Round sheet (ϕ11.8")	1
	P5		M6 Knurled nut	4
	P6		Universal head (ϕ1"H2.2)	1
ROD301970BK	P7		Rod (L24"*Φ0.7")	1
	P8		Rod (L16"*Φ0.7")	1
	P9		Rod (L12"*Φ0.7")	2
	P10		Rod (L6"*Φ0.7")	1
P-2500D44BK-1	P11		E12 Socket Cup (ϕ0.9"*H2")	32
	P12		E12 Socket	32
	P13		Head tube	32
	P14		metal part	32
	P15		ball (Φ7.8")	1
P-2500D44BK-2	P16		Safety device+screw	2
	P17		Steel wire	1


2500D44BK L44″W44″L32

Parts Number	Part	Picture	Description	Qty
Cord-144-14#	P18		UL14#,L144"	1
P-2500D44BK-A	A		(Metal bars+50# Multi-faceted crystal ball) Length 18.5″	46
P-2500D44BK-B	B		(Metal bars+Metal Welding flower)Length 18.5″	91
P-2500D44BK-C	C		(Metal bars+Metal Welding flower +Trapezoidal crystal)Length 18.5″	46
P-2500D44BK-D	D		(Metal bars+Metal Welding flower) Length 17.91″	1
P-2500D44BK-Z1	Z1		ϕ1.7″Circular gasket	2
P-2500D44BK-Z2	Z2		$\frac{5}{8}$″ Hexagon nut	3
P-2500D44BK-Z3	Z3		$\frac{5}{8}$″ Threaded rod(L12″)	1
P-2500D44BK-Z4	Z4		Heavy duty hickey(L2″)($\frac{5}{8}$″and $\frac{1}{4}$-18″)	1
P-2500D44BK-Z5	Z5		$\frac{1}{4}$-18″ Hexagon nut	3
P-2500D44BK-Z6	Z6		$\frac{1}{4}$-18″ Threaded rod(L3.14″)	1

Parts Number	Part	Picture	Description	Qty

Step 2

Frame Assembly Diagram

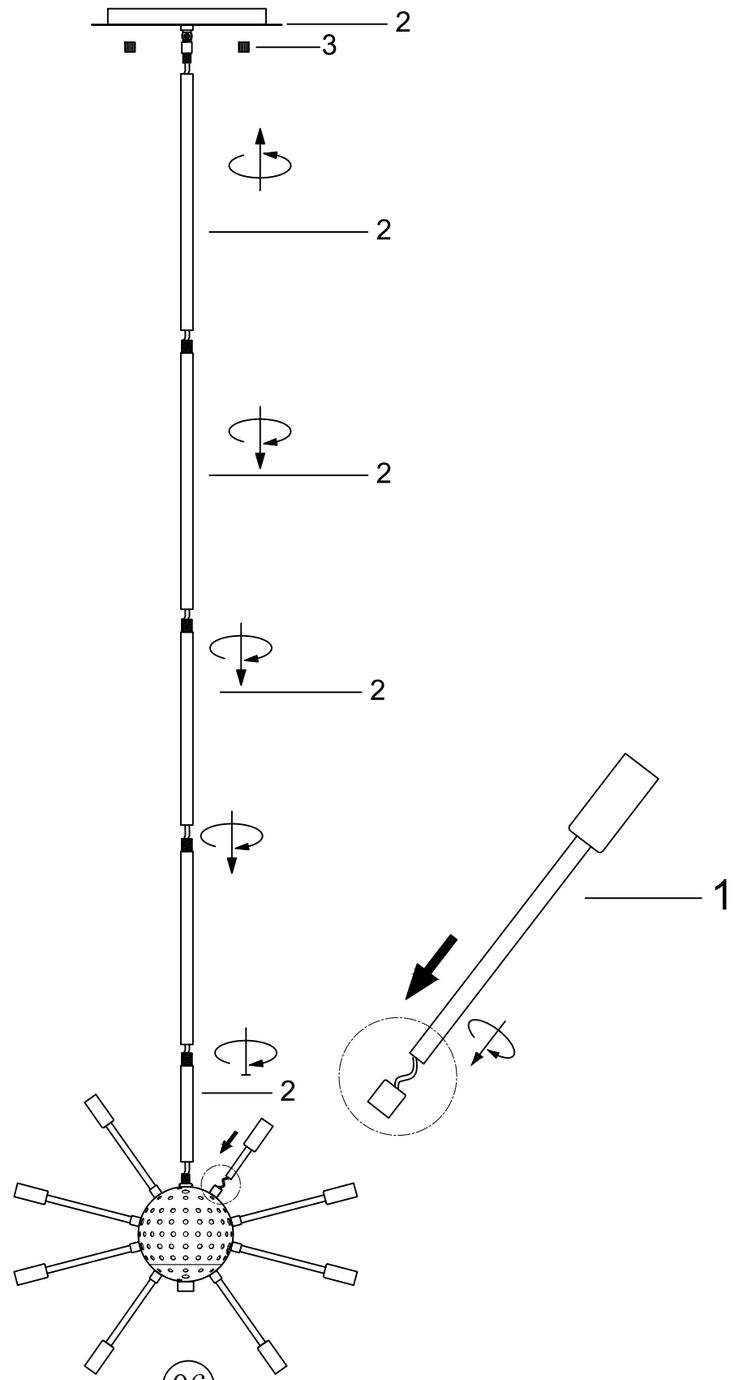

Frame Assembly Instructions

Installation:
Please read all instructions carefully. Before you proceed to install make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

1.Tighten the lamp holder rod in the corresponding hole of the lamp body.

2.Install 3 rods ,lamp body and canopy.


3.Locking the canopy with mounting bracket by nut.

4.Install E12 Bulbs(bulbs not include)

Step 3

Canopy Instation Instrustion

IMPORTANT:Test sockets with bulb before dressing the fixture.

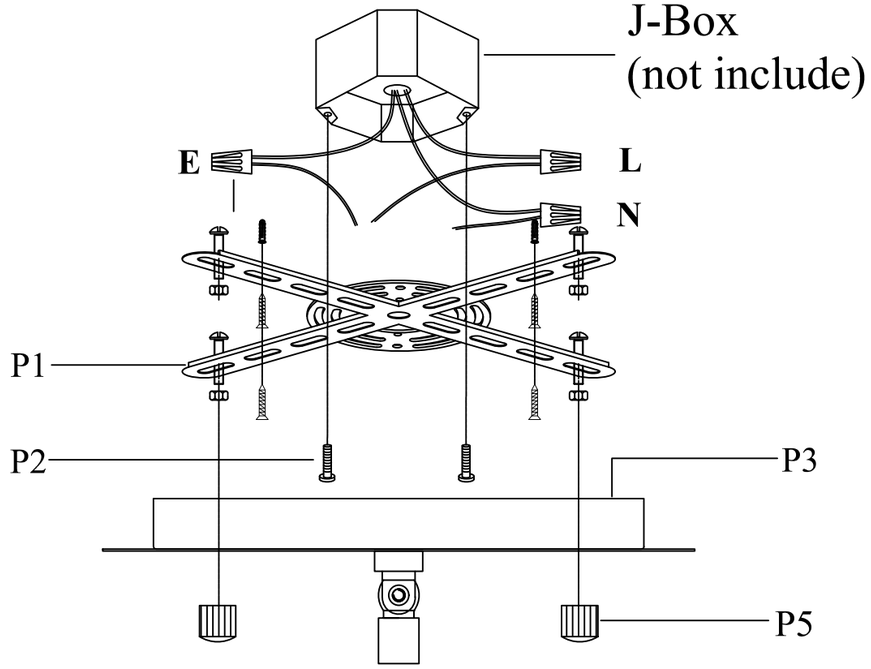

1 .Attach the Mounting bracket(P1) to the electrical box.


2 .Pull wires up through the Junction Caps.

″L″=Hot wire
″N″=Neutral wire
″E″=GND

Step 4

① Thread the steel wire to the Mounting bracket according to the below figure,and then use Safety device to lock the steel wire. Please pull down the excess steel wire to prevent the lamp body from fallinG.Roll up the excess steel wire put it into the canopy.

② Fix the lamp body to ceiling(junction box).

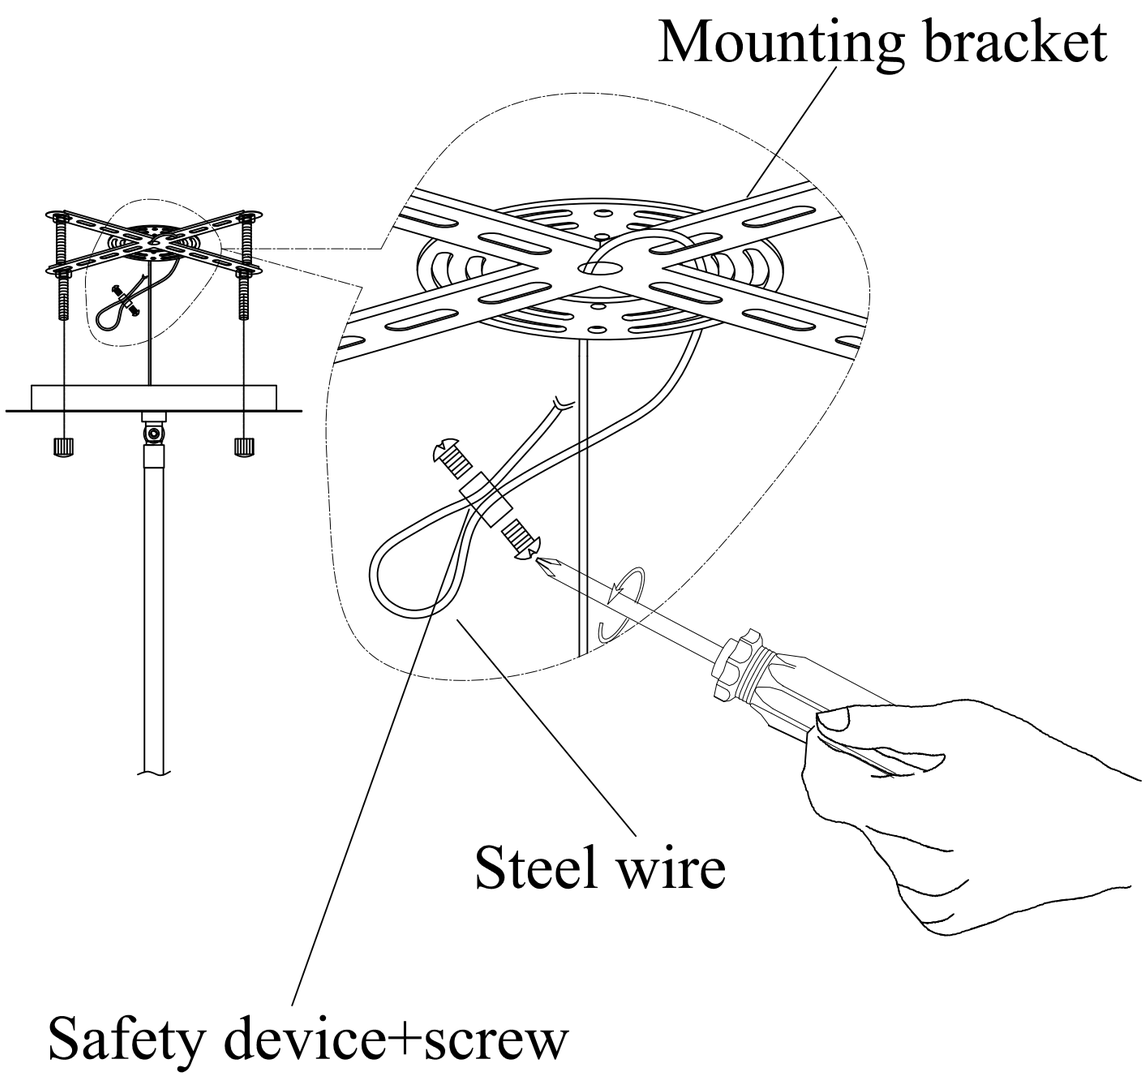

Canopy Instation Instrustion

①:Drill a 0.7" hole in the ceiling reinforcment to allow a $\frac{5}{8}$″ threaded rod to pass through.

②: Attach the electrical box to the ceiling reinforcment and pass the $\frac{5}{8}$″ threaded rod through the box and secure it to the heavy duty hickey.

③:Pass the fixture wires and ground wire through the loop, canopy ring, center hole of canopy and the heavy duty hickey.


④:Lead the steel wire under the hanging plate, through the corresponding holes of the cylindrical iron parts, and fix the (P16)safety device and steel wire with a screwdriver according to the picture.

⑤:Pull ceiling wires down through the fixture box and make connection.

⑥:Screw loop only onto threaded pipe.

⑦:Hang the fixture on chain.

⑧:Secure the canopy with canopy ring.

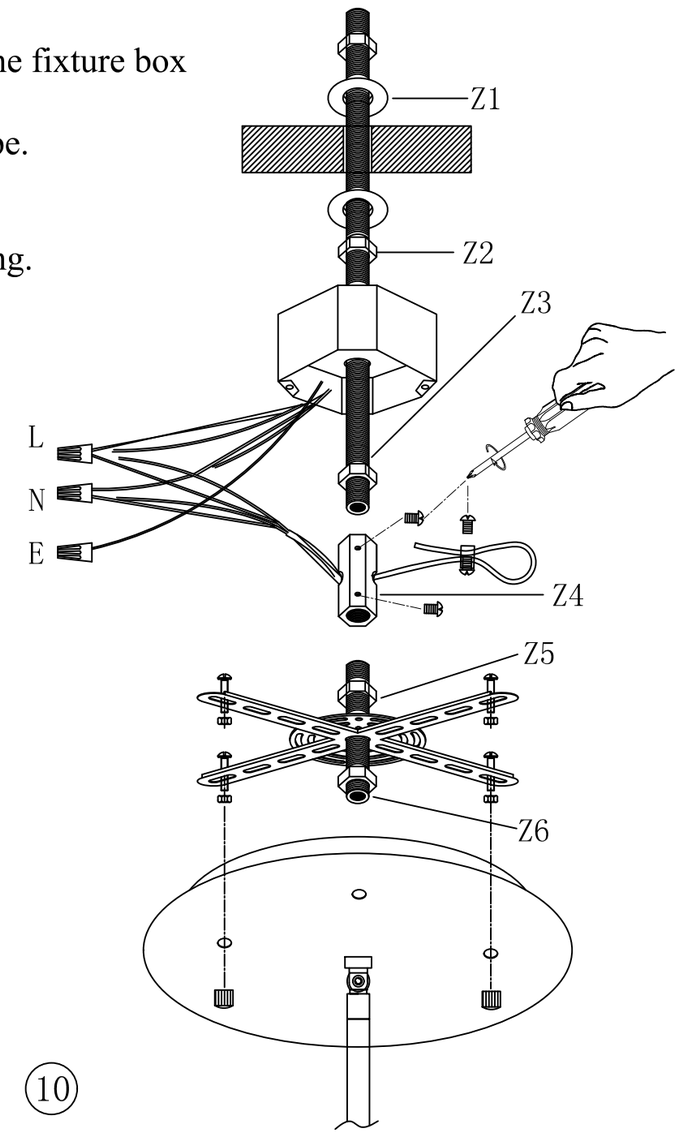


″L″=Hot wire
″N″=Neutral wire
″E″=GND

Step 5


Crystal Dressing Diagram




When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves.So as to prevent any damage or smudging on the crystals.

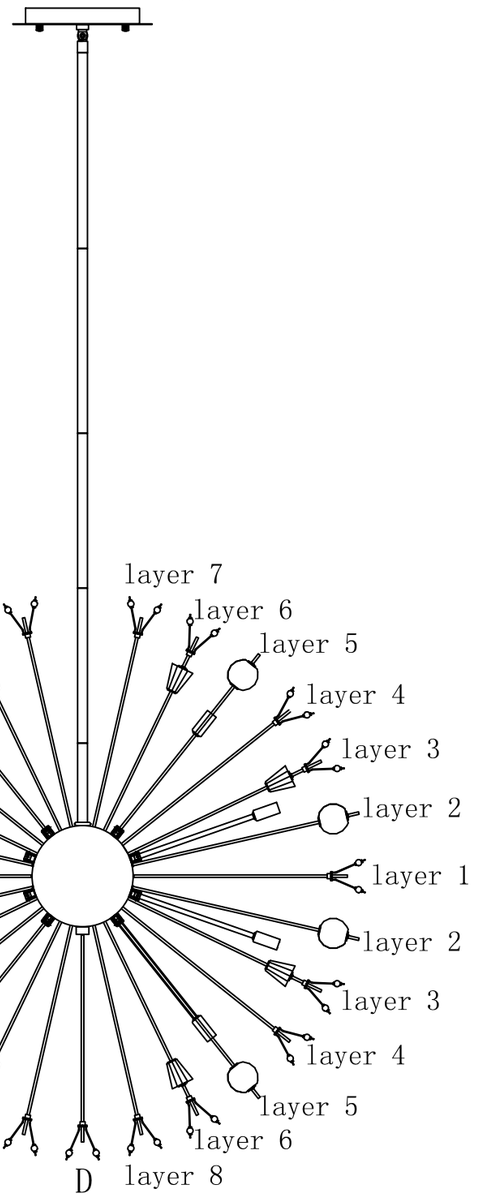


1. First find the holes corresponding to D, and screw on the crystals corresponding to D.

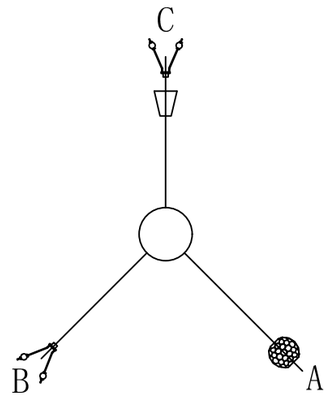


layer 7 Installation diagram

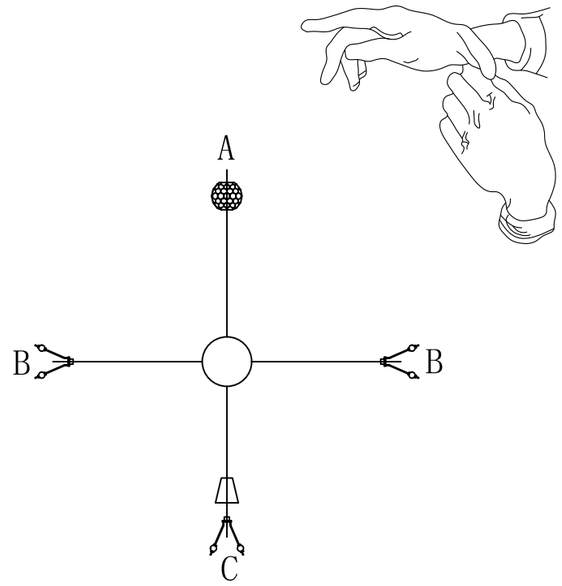


layer 8 Installation diagram

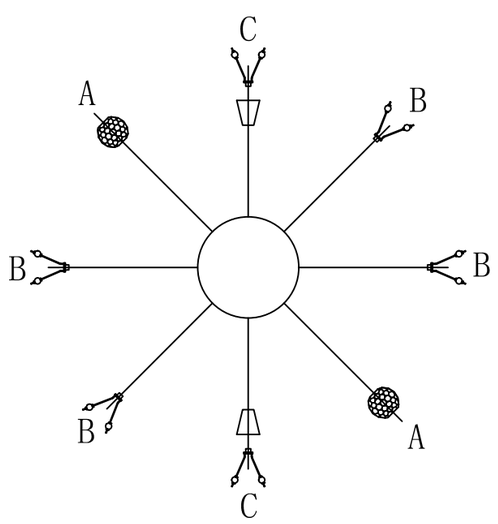


layer 6 Installation diagram

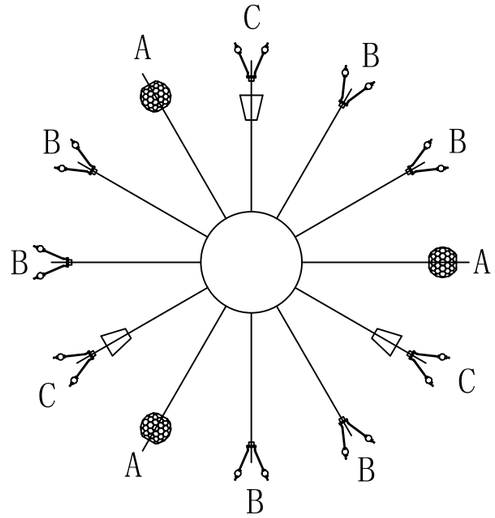


layer 5 Installation diagram



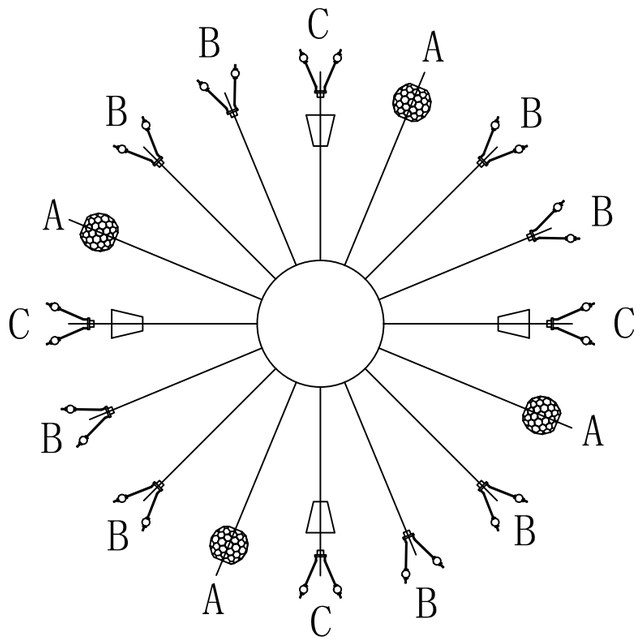



layer 4 Installation diagram

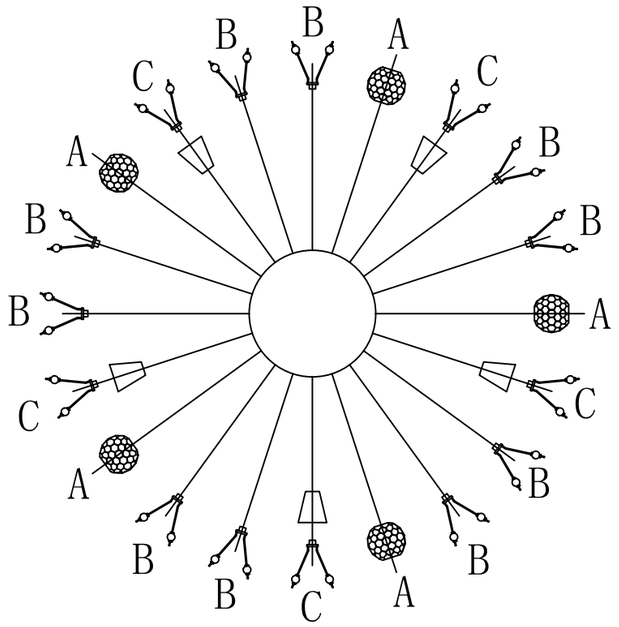


layer 3 Installation diagram

2500D44BK L44″W44″L32



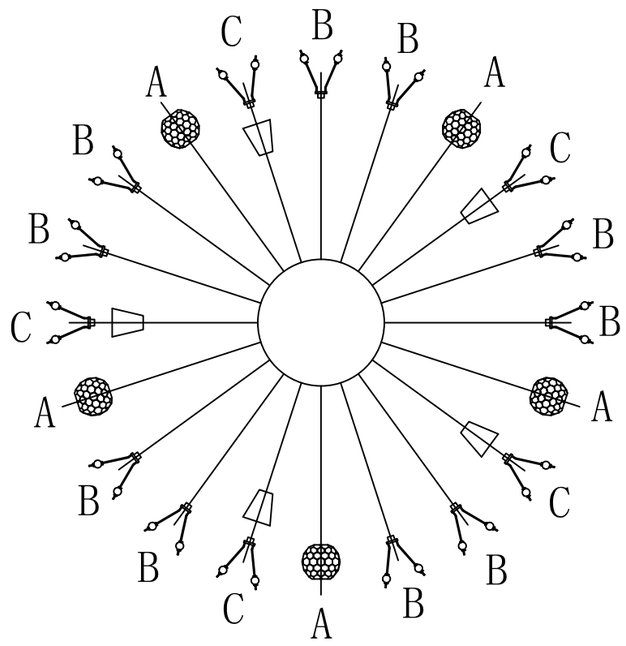

layer 2 Installation diagram

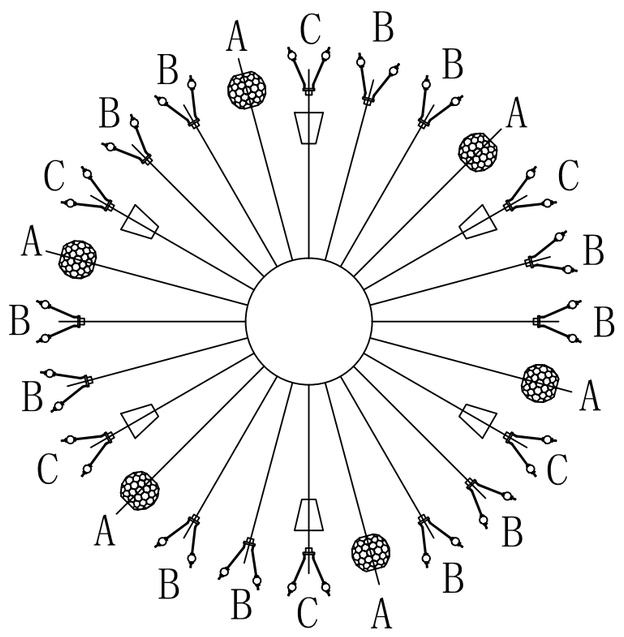

layer 1 Installation diagram

Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

2500D44BK L44"W44"L32

Cleaning and Maintenance of Chandelier Frame

The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth.Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals

Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts

Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us . For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle . You will be contacted with prices prior toshipment. All orders must be pre-paid.

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department.
A written return authorization form will be sent to you with specific instructions.

2500D44BK L44"W44"L32

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department .Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reseserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warrantee, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.

Version：04/08/2024