WAC LIGHTING

1" LEDme

Square Open Reflector Downlight w/ Integral Driver

Fixture Type:

Catalog Number:

Project:


Location:

Model	Color Temp & CRI	Lumens	CBCP	Finish
❍ HR-LED251E	❍ 30 3000K - 85 ❍ 40 4000K - 85	250 285	540 608	❍ BN Brushed Nickel ❍ GM Gun Metal

Example: **HR-LED251E-30-BN**

DESCRIPTION

Perfect for ceilings, under cabinet and wall niches. LED Miniature Recessed Downlights offer a super low profile and Die-cast aluminum trim with a 25° cutoff angle for comfortable general and task lighting.

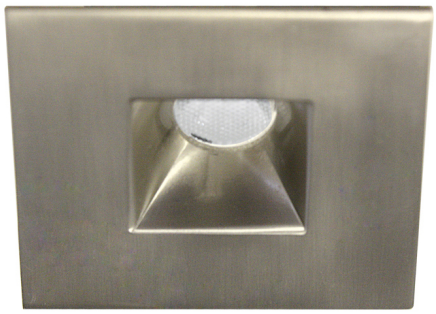

FEATURES

- New Construction, may be re-configured in the field for Remodel
- Driver required
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum trim, aluminum heat sink and 20 gauge steel housing painted black.
Power:	4W
Input:	120 VAC,50/60Hz
Dimming:	ELV: 100-10%
Light Source:	Integrated LED, 3 Step Mac Adam Ellipse
Rated Life:	80,000 Hours
Mounting:	Heavy gauge retention clips secures housing firmly to ceiling
Cut Out:	2 1/2"
Finish:	Electroplated Gun Metal, Electroplated Brushed Nickel
Ceiling Thickness:	1/2" - 1"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, IC

FINISHES:



Brushed Nickel




Gun Metal

REPLACEMENT PARTS

REF-R4-F - Flood Reflector
REF-R4-N - Narrow Flood Reflector
REF-R4-W - Wide Flood Reflector

LINE DRAWING



WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. August 2026